


PLASTIC FILTER 3" SUPER



WITH BRUSH

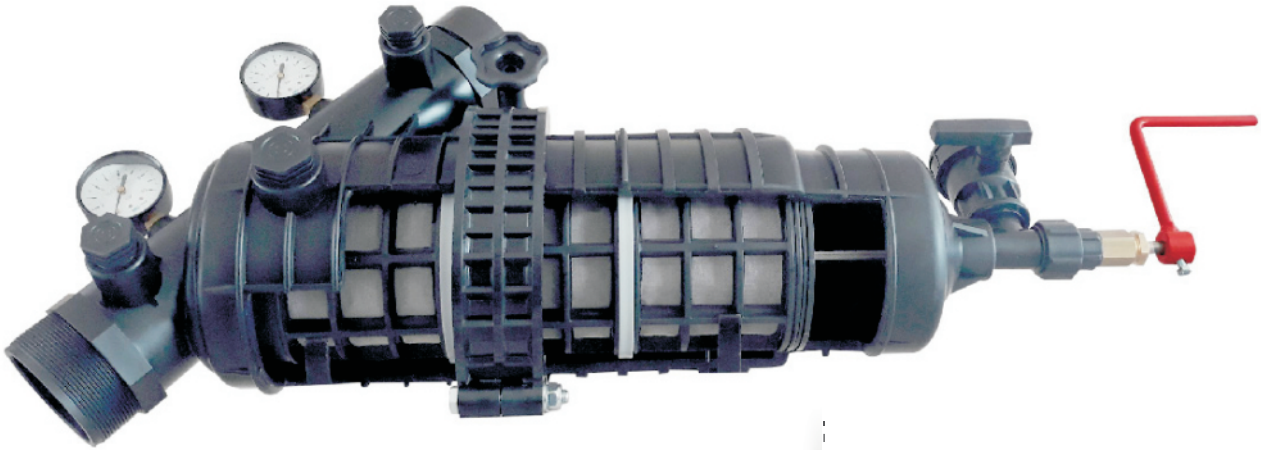

TECHNICAL SPECIFICATIONS

TYPE	3" SUPER	
DIAMETER OF INCOME (INCHES)	3"	
MAXIMUM FLOW (M3/H)	75 m ³ /h	
ACTIVE SURFACE (CM2)	SCREEN	790 cm ²
	DISK	1847 cm ²
WEIGHT (KG)	SCREEN	4,8 kg
	DISK	5,8 kg

The 3" SUPER plastic filter includes 3/4" Automatic lubrication connection, 1/4" gauge Metal threads and INOX double mesh.

Semi-automatic filters provide a quick and efficient solution for filter cleaning "manually". The brush system can be placed on metal and plastic filters and converted to semi-automatic operation.

By converting a manual filter into semi-automatic it is not necessary to stop water supply to the grid and disassemble it for cleaning. The network continues to operate during cleaning.

On brush-operated models simply open the drain valve and use the brush to clean the element.

MATERIALS

- **Housing:** Polypropylene Copolymer PB 150
- **Filter material:** AISI 316 Stainless Steel
PE Cylinder disc
- **Clamp:** Glass reinforced polyamide
- **Sealant:** NBR
- **Maximum Pressure:** 10 bar / 145 psi
- **Maximum temperature:** 60 °C / 140 F